


MD1FDF1 / 無啲 杞無 控娘

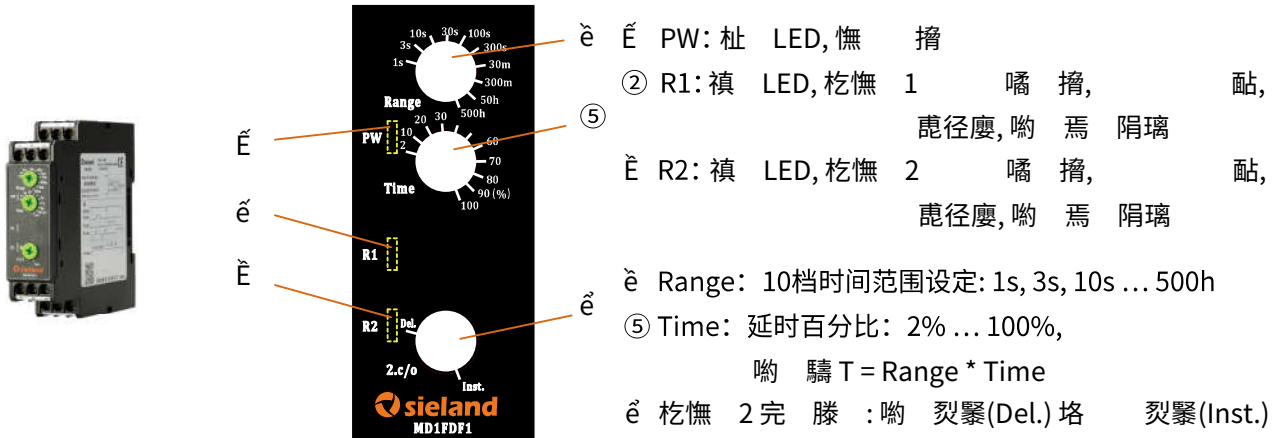


費侏咄噠

- (e) 廠喇顛無仄: 12 - 240 V AC/DC
- (e) 駝鑄伊 Y1 焉駝鶉焗 喇顛無仄A1擡
- (e) 10嫂 墩荷 仔炳: 1s, 3s, 10s, 30s, 100s, 300s, 30m, 300m, 50h, 500h
- (e) 擡 杆黠 2% - 100% 焗杞仔

埭碌


喇顛無仄:	12 - 240V AC/DC
無仄塢潄滴啤:	-15% ... +10%
無仄瘁恹:	DC 塔 50/60Hz
擡 駝鑄伊Y1:	焗 喇顛無仄A1擡
滕 擡 :	0.02s - 500h
滕 滴啤:	±10%
刀昊 :	±0.5%
滴啤:	±0.05%/°C
無仄 滴啤:	±0.2%/V
駝鶉無 :	10A/250VAC
無嵐支 :	10 ⁵ 駝鶉 嫩
嬰支 :	10 ⁷ 駝鶉 嫩
罈 支朱:	IP50/IP20
喇顛 :	-40°C...60°C
:	-40°C...85°C
刳咽叶 :	22.5*92*100mm
厄 扮 :	35mm DIN嫠髒反
費侏嫠髒:	IEC61812-1-GB14048.5

T: 0.02s-500h
A1-A2: 12-240V AC/DC, 50/60Hz
— 10A 250V AC



注意：工作电压 A1-A2 接直流电压时，A1必须接正极，A2接负极

延时功能图

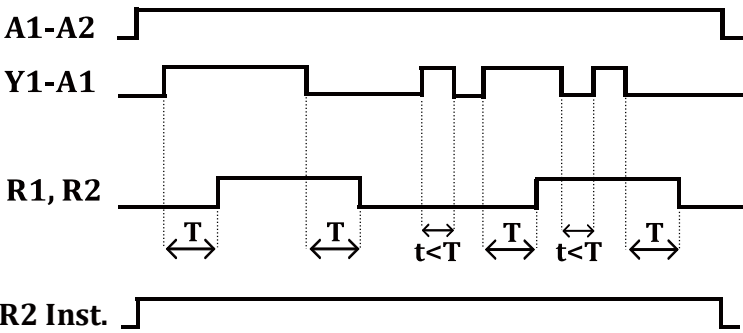

延时值设定实例

(e) 延时3秒

时间范围旋钮 Range 选择 3s 档位, 百分比旋钮 Time 转到 100% 位置,

延时值 $T = Rang * Time = 3s * 100\% = 3s$

(e) 延时5秒

时间范围旋钮 Range 选择 10s 档位, 百分比旋钮 Time 转到 50% 位置,

延时值 $T = Rang * Time = 10s * 50\% = 5s$